


- SE/WR-CD-TYPE
- · SE/WR-S-TYPE
- · SE/WR-DC-TYPE




PLASTIC WASTE RECYCLING MACHINE

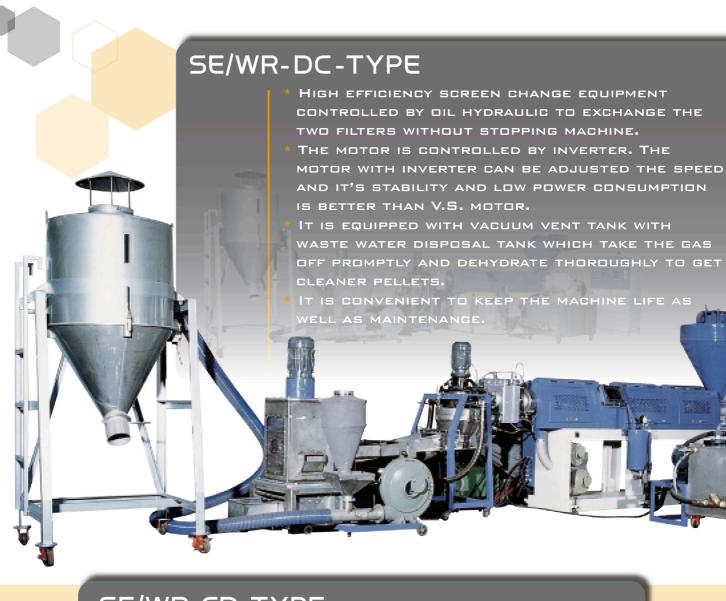



## SE/WR-CD-TYPE

- THIS MODEL IS TWO STAGE TYPE WHICH USES OIL HYDRAULIC SCREEN CHANGER TO CHANGE THE FILTER MORE EASILY AND PROMPTLY.
- THE MAIN DIE MOULD HAS A SPECIAL DESIGN TO GET THE VENT EFFECT AND LET THE MELTED RESIN DROPS SMOOTHLY INTO THE HOPPER.
- IT EQUIPPED WITH A FORCE FEEDING HOPPER TO ENSURE THE CRUSHED FILMS DROPS STABLY INTO THE BARREL.
- \* IF WE DON'T HAVE BUDGET FOR CRUSHER, WE CAN CHOOSE SIDE FEEDING HOPPER TO HELP US ACHIEVING FEEDING PERFECTLY:



FΠ

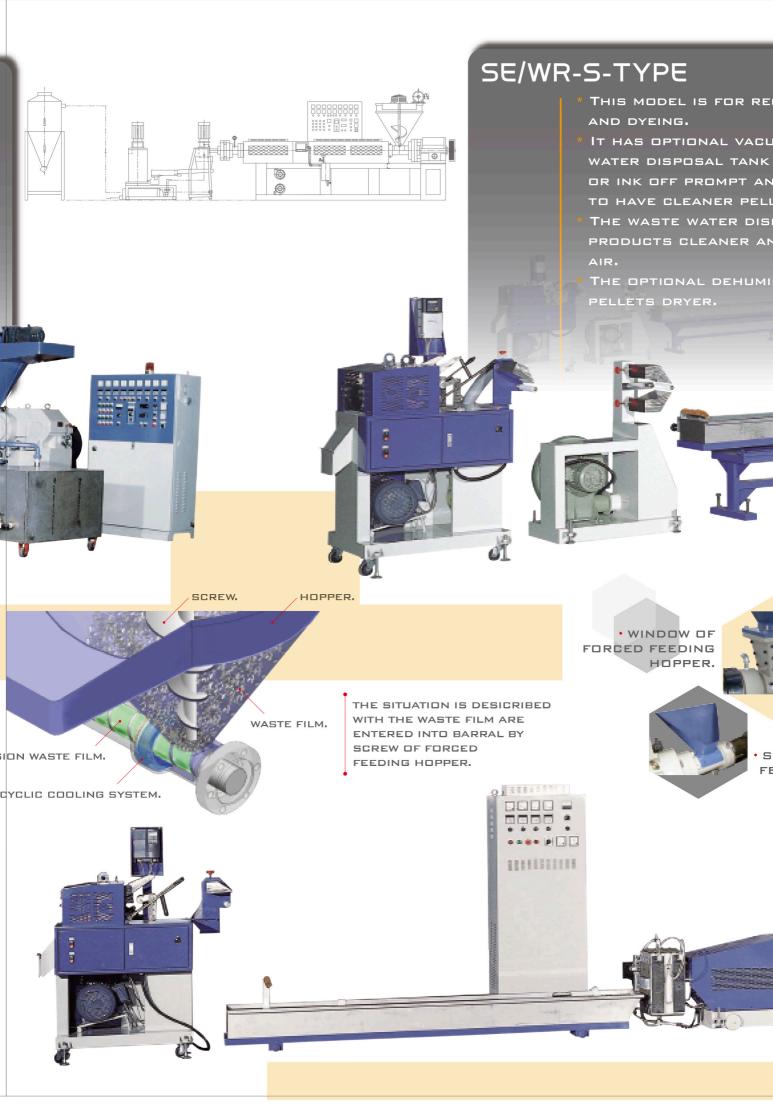

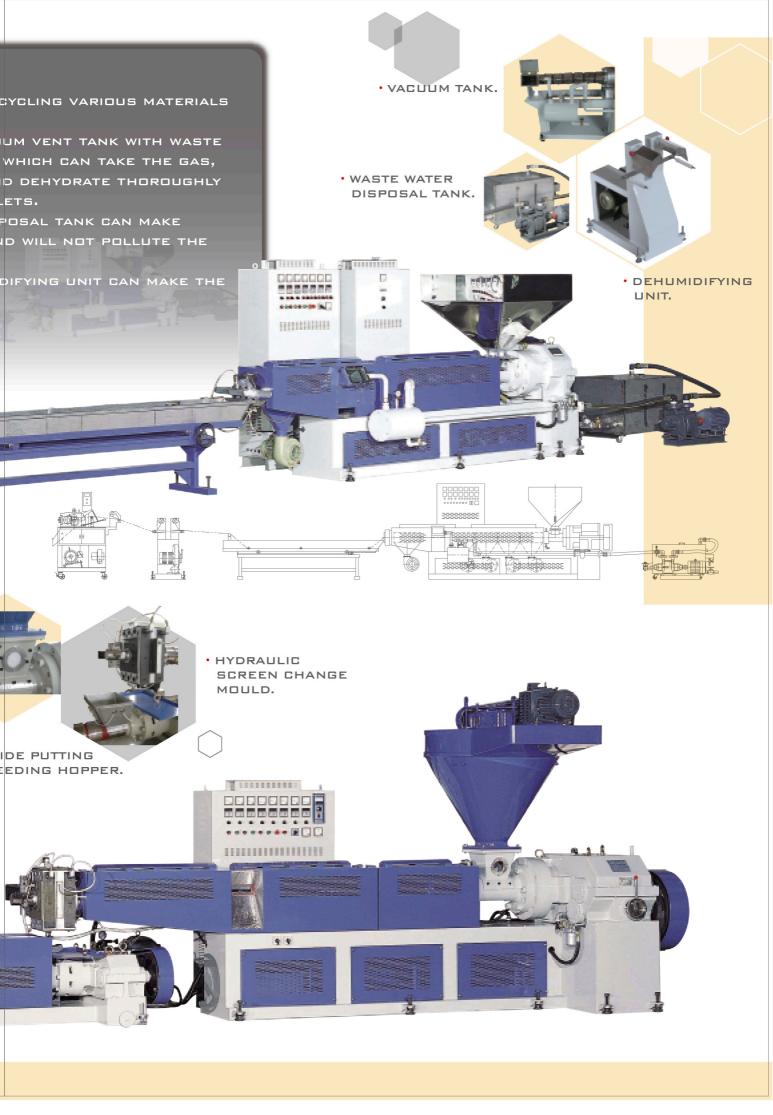

MODEL	SE/WR-85CD		SE/WR-100CD		SE/WR-120CD		
MATERIAL	PP, PE FILM		PP, PE FILM		PP, PE FILM		
OUTPUT	100-150 KG/HR		150-200 KG/HR		250-300 KG/HR		
EXTRUDER	MAIN	VICE	MAIN	VICE	MAIN	VICE	
DRIVE MOTOR	40 HP	20 HP+INVERTER	60 HP	30 HP+INVERTER	100 HP	40 HP+INVERTER	
SPEED RANGE	2 STEPS	STEPLESS	2 STEPS	STEPLESS	2 STEPS	STEPLESS	
SCREW DIAMETER	85MM	85MM	100 MM	100 MM	120 MM	120 MM	
L/D RATIO	32	10/1	32	10/1	32	10/1	
HEAT CAPACITY	50 KW	25 KW	70 KW	35 KW	90 KW	45 KW	
TEMP. CONTROL	6 ZONEs	3 ZONES	7 ZONEs	3 ZONES	8 ZONEs	4 ZONES	
VENT EQUIPMENT	1 SET	NON	1 SET	NON	1 SET	NON	
DIE USE HYDRAULIC SCREEN CHANGE							
COOLING UNIT	2000×355×250 MM		2800×355×250 MM		3000×395×250 MM		
CUTTING UNIT	3 HP+INVERTER		5 HP+INVERTER		7 1/2 HP+INVERTER		
FORCE FEEDING HOPPER	5HP+INVERTER		5HP+INVERTER		5HP+INVERTER		
FLOOR DIAMENSION	10×2.1×2.21 M		11.5×2.2×2.35 M		12.5×2.3×2.35 M		
MACHINE WEIGHT	4500KGS		6500 KGS		8500 KGS		
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.							

MODEL	SE/WR-85S	SE/WR-100S	SE/WR-120S			
MATERIAL	PS/PC/ABS/475 SCRAP	PS/PC/ABS/475 SCRAP	PS/PC/ABS/475 SCRAP			
OUTPUT	200 KG/HR	300 KG/HR	400 KG/HR			
EXTRUDER	SINGLE	SINGLE	SINGLE			
DRIVE MOTOR	50 HP+INVERTER	75 HP+INVERTER	125 HP+INVERTER			
SPEED RANGE	STEPLESS	STEPLESS	STEPLESS			
SCREW DIAMETER	85MM	100 MM	120 MM			
L/D RATIO	32	32	32			
HEAT CAPACITY	50 KW	70 KW	90 KW			
TEMP. CONTROL	6 ZONEs	7ZONEs	8 ZONEs			
VENT EQUIPMENT	1 SET	1 SET	1 SET			
DIE	MANUAL SCREEN CHANGE					
COOLING UNIT	WATER BATH (STAINLESS STEEL)					
CUTTING UNIT	5 HP+INVERTER	5 HP+INVERTER	7 1/2 HP+INVERTER			
FORCE FEEDING HOPPER	5HP+INVERTER	5HP+INVERTER	5HP+INVERTER			
FLOOR DIAMENSION	8.8×2.1×2.3M	9.8×2.2×2.35 M	10.8×2.3×2.35 M			
MACHINE WEIGHT	3400KGS	4500 KGS	6000 KGS			

OPTIONAL: 1. VACUUM TANK 2. WASTE DISPOSAL TANK 3. DEHUMIDIFYING UNIT

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

MODEL	SE/WR	-100DC	SE/WR-120DC		
MATERIAL	PP, PE FILM		PP, PE FILM		
OUTPUT	150-20	0 KG/HR	250-350 KG/HR		
EXTRUDER	SIN	GLE	SINGLE		
DRIVE MOTOR	60 HP+INVERTER		125 HP+INVERTER		
SPEED RANGE	STEF	PLESS	STEPLESS		
SCREW DIAMETER	100 MM		120 MM		
L/D RATIO	34		34		
HEAT CAPACITY	70 KW		90 KW		
TEMP. CONTROL	9 ZONES		10 ZONES		
VENT EQUIPMENT	1 SET		BHGF12		
DIE	TYPE:	DOWNWARD CUT TYPE	TYPE:	DOWNWARD CUT TYPE	
	MOTOR:	3 HP AC+INVERTER	MOTOR:	3 HP AC+INVERTER	
DIL	SCREEN CHANGE:	HYDRAULIC SCREEN CHANGE	SCREEN CHANGE:	HYDRAULIC SCREEN CHANGE	
	CUTTER:	3 PCS. SUS # 304	CUTTER:	3 PCS. SUS # 304	
	MOTOR:	5 HP AC+3 HP PUMP	MOTOR:	5 HP AC+3 HP PUMP	
DEHYDRATION UNIT	DEHYDRATOR:	VERTICAL TYPE	DEHYDRATOR:	VERTICAL TYPE	
	MATERIAL:	STAINLESS STEEL SUS #304	MATERIAL:	STAINLESS STEEL SUS #304	
	DELIVERY UNIT:	3 HP BLOWER	DELIVERY UNIT:	5 HP BLOWER	
STORAGE TANK	CAPACITY:	300 L	CAPACITY:	500 L	
	MATERIAL:	STAINLESS STEEL SUS #304	MATERIAL:	STAINLESS STEEL SUS #304	
SIDE FORCE FEEDING	MOTOR:	7.5HP+INVERTER	MOTOR:	7.5HP+INVERTER	
HOPPER	CAPACITY:	2000 L WASTE STORAGE TANK	CAPACITY:	2000 L WASTE STORAGE TANK	
FLOOR DIAMENSION	10.0×2.2×2.5 M		11.0×2.3×2.8 M		
MACHINE WEIGHT	6500KGS		8000KGS		



## SOUTHEAST MACHINERY CO.,LTD. COMPANY PROFILE

SOUTHEAST MACHINERY BEGAN BY MAKING TWO-STAGE PELLETIZERS IN 1987 WITH ONLY FIVE EMPLOYEES AND NT\$1 MILLION IN CAPITAL. NOW WE EMPLOY 30 STAFFERS AND SPECIALIZE IN VARIOUS PLASTIC EXTRUDERS AND TURNKEY PLANTS.

BACKED BY 20 YEARS IN R&D, INNOVATION, AND TECHNOLOGICAL INTEGRATION, WE ARE FULLY CAPABLE OF SUPPLYING A RANGE OF PLASTIC-PROCESSING MACHINERY AND TURNKEY PLANTS THAT MAKE BUSINESS EASY AND MORE PROFITABLE FOR DISTRIBUTORS AND END-USERS. OUR MACHINES ARE SUPPLIED WITH PROFESSIONAL AFTER-SALES SERVICE AND ARE KNOWN FOR THEIR SUPERIOR-QUALITY, COST-EFFECTIVENESS AND HIGH EFFICIENCY.

CUSTOMER LOYALTY AT HOME AND OVERSEAS HAS HELPED US TO GROW STEADILY AND ACHIEVE SUCCESS GLOBALLY. TO ENHANCE OUR GLOBAL PRESENCE, WE ARE DEDICATED TO DEVELOP INNOVATIVE PRODUCTS, STREAMLINE EFFICIENCY, EXPAND FACTORY, AND UPGRADE MANAGEMENT, WITH THE ULTIMATE GOAL OF OFFERING THE BEST, COMPETITIVELY-PRICED MACHINERY FOR THE PLASTIC PROCESSING INDUSTRY.

## OUR OTHER PRODUCTS

- · HD/LD/LLDPE/PP BOWING FILM MAKING LINE
- PVC HEAT SHRINKABLE FILM MAKING LINE
- · PVC PROFILE MAKING LINE
- PVC/PE/PP PIPE MAKING LINE
- · PP DRINKING STRAW MAKING LINE
- · PP PACKING TAPE MAKING LINE
- · MANUFACTURE OF OTHER EXTRUSION MACHINERY
- · ALL KINDS OF EXTRUSION TURN-KEY PLANT



## 鷹順塑膠機械股份有限公司 SOUTHEAST MACHINERY CO., LTD.

公司地址:74550台南縣安定鄉海寮村5之48號 NO.5-48 HAILIAO VILLAGE, ANDING SHIANG,

TAINAN HSIEN, TAIWAN R.O.C

TEL:886-6-5938640(REP)

FAX:886-6-5935351(SALES)

E-mail:se7966@ms17.hinet.net

www.southeast.com.tw